




# SINGLE SPRING

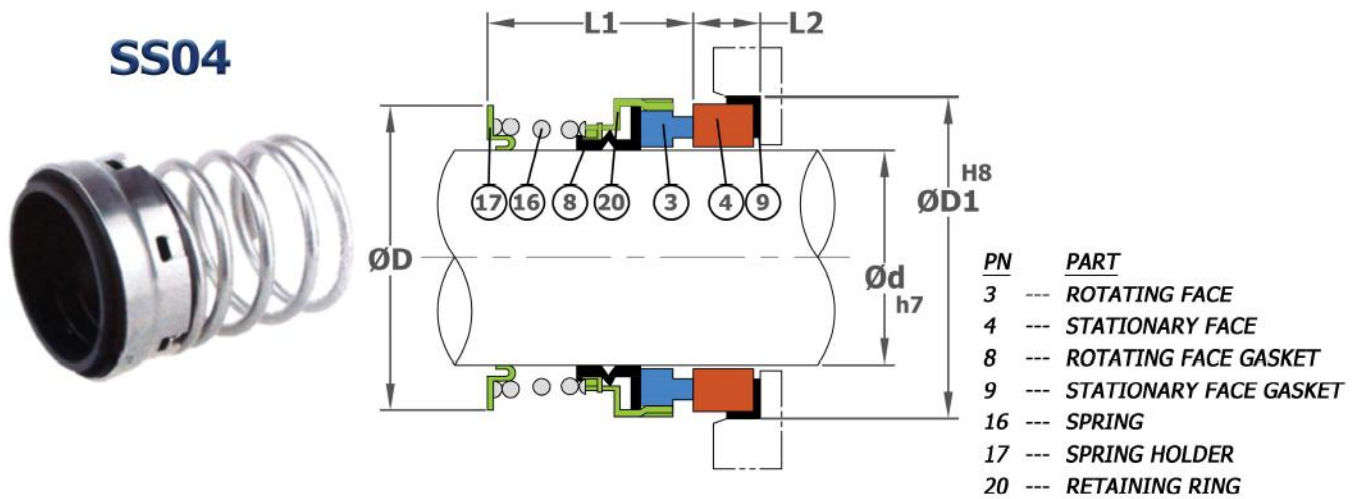

## MATERIALS

Hardware : 316 SS

Rotating face : Carbon, SiC, SSiC, TC

Stationary face : Ceramic, SiC, SSiC, TC

Elastomers : NBR, FKM, EPDM

## OPERATING CONDITIONS

Media : Water, Oil, Less Corrosive  
Mediums etc..

Pressure : ≤ 10 Bar

Temperature \* : - 20°C ~ 180°C

Speed : ≤ 12 m/s

SIZE d (Inch)	D (mm)	D1 (mm)	L1 (mm)	L2 (mm)
.625	27.76	31.75	33.52	10.29
.750	30.60	34.93	33.52	10.29
.875	35.00	38.10	35.13	10.29
1.000	39.00	41.28	39.87	11.10
1.125	42.00	44.45	41.48	11.10
1.250	45.00	47.63	41.48	11.10
1.375	49.00	50.80	43.05	11.10
1.500	51.00	53.98	43.05	11.10
1.625	58.00	60.33	51.00	12.70
1.750	61.00	63.50	51.00	12.70
1.875	63.80	66.68	54.17	12.70
2.000	68.00	69.85	54.17	12.70
2.125	71.42	76.20	60.53	14.27
2.250	74.60	79.38	60.53	14.27
2.375	77.77	82.55	63.70	14.27
2.500	80.95	85.73	63.70	14.27
2.625	85.73	85.73	70.05	15.90
2.750	88.90	88.90	70.05	15.90
2.875	92.08	95.25	73.20	15.90
3.000	95.25	98.43	73.20	15.90

\* Depending on material selected

All specifications, instrumentation and capabilities subject to change without notice

P/N: SS04-23

[www.steinseal.in](http://www.steinseal.in)