




# ELASTOMER BELLOWS

**SS301**

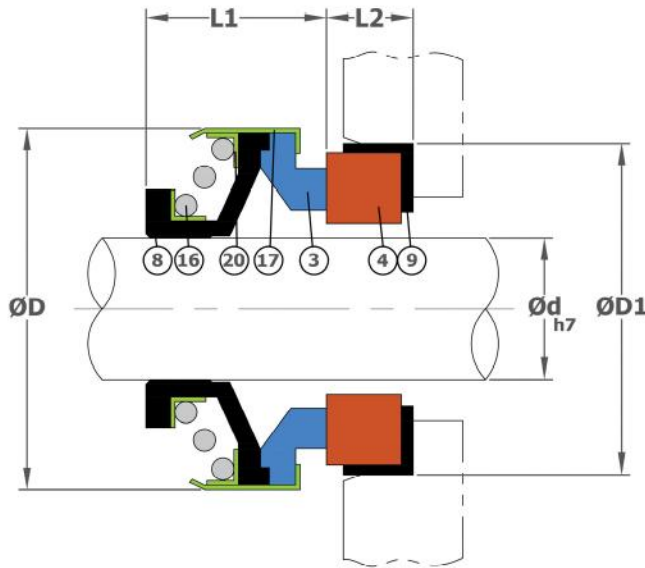

- | PN | PART                   |
|----|------------------------|
| 3  | ROTATING FACE          |
| 4  | STATIONARY FACE        |
| 8  | ROTATING FACE GASKET   |
| 9  | STATIONARY FACE GASKET |
| 16 | SPRING                 |
| 17 | SPRING HOLDER          |
| 20 | RETAINING RING         |

## MATERIALS

- Hardware : 316 SS, 304SS
- Rotating face : Carbon, SiC
- Stationary face : Ceramic, SiC, TC
- Elastomers : NBR

## OPERATING CONDITIONS

- Media : Water, Oil etc..
- Pressure : ≤ 4 Bar
- Temperature \* : - 20°C ~ 150°C
- Speed : ≤ 10 m/s

SIZE (mm)	d h6 (mm)	D Max. (mm)	D1 H8 (mm)	L1 ±0.5 (mm)	L2 (mm)
6	6	18	18	10	4
8S	8	18	22	11	4
8M	8	20	21	13	6
8L	8	24	26	11	8
10	10	24	26	11	8
11	11	24	26	13	8
12	12	24	26	13	8
13	13	24	26	13	5.5
13H	13	24	26	13	8
14S	14	26	28.0/28.5	13	8
14M	14	28	28.0/28.5	13	8
14L	14	32	29.5/38.0	13	8
15S	15	28	30	13	8
15M	15	32	29.5	13	8
15L	15	39	38	13	8
16S	16	28	30	13	8
16M	16	32	29.5	13	8
16L	16	39	42	13	8
17	17	39	42	13	8
18	18	39	42	13	8
19	18	39	42	13	8
20S	20	35	38	13	8
20M	20	39	42	13	8
20L	20	42	45	13	10

SIZE (mm)	d h6 (mm)	D Max. (mm)	D1 H8 (mm)	L1 ±0.5 (mm)	L2 (mm)
22S	22	39	42	13	8
22	22	42	45	13	10
23	23	47	50	13.5	10
24	24	47	50	13.5	10
25	25	47	50	13.5	10
25S	25	41.5	45/50	13.5	10
26	26	47	50	13.5	10
27	27	47	50	13.5	10
28	28	54	57	15	10
30	30	54	57	15	10
32	32	54	57	15	10
35	35	60	63	16	10
38	38	65	68	18	12
40	40	65	68	18	12
45	45	70	73	20	12
50	50	85	88	23	15
55	55	85	88	23	15
60	60	105	110	30	15
65	65	105	110	30	15
70	70	105	110	32	15

\* Depending on material selected

ELASTOMER BELLOWS