




MULTI-SPRING UNBALANCE

SSMSU

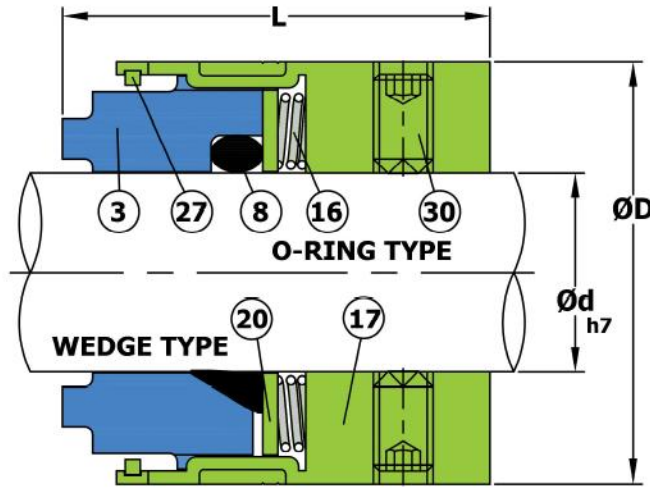

PN	PART
3	--- ROTATING FACE
8	--- ROTATING FACE O-RING / GASKET
16	--- SPRING
17	--- SPRING HOLDER
20	--- RETAINING RING
27	--- SNAP RING
30	--- SET SCREW

MATERIALS

Hardware : 316 SS
 Rotating face : CARBON, SiC, SSiC, TC
 Stationary face : SiC, SSiC, TC
 Elastomers : EPDM, FKM, FFKM, PTFE

OPERATING CONDITIONS

Media : Petroleum, Chemical Solvents,
 Weak and Medium Acids, Water,
 Oil, Alkali etc..
 Pressure : ≤ 20 Bar
 Temperature * : - 20°C ~ 200°C
 Speed : ≤ 20 m/s

SIZE d (Inch)	D (Inch)	L (Inch)
.750	1.190	.937
.875	1.315	.937
1.000	1.440	1.000
1.125	1.565	1.000
1.250	1.690	1.000
1.375	1.940	1.125
1.500	1.940	1.156
1.625	2.250	1.375
1.750	2.315	1.375
1.875	2.500	1.375
2.000	2.625	1.375
2.125	2.815	1.375
2.250	2.845	1.375
2.375	3.000	1.687
2.500	3.125	1.687
2.625	3.250	1.687
2.750	3.375	1.687
2.875	3.500	1.687
3.000	3.625	1.687
3.125	3.750	1.687
3.250	3.875	1.687
3.375	4.000	1.687
3.500	4.125	1.687
3.625	4.250	1.687
3.750	4.375	1.687
3.875	4.500	1.687
4.000	4.625	1.687

SIZE d (mm)	D (mm)	L (mm)
20	34.2	24.0
22	36.5	24.0
24	37.8	26.7
25	39.5	27.0
28	42.5	30.0
30	44.5	30.5
32	46.5	30.5
33	47.5	30.5
35	49.5	30.5
38	55.0	32.0
40	57.0	32.0
43	60.0	32.0
45	62.0	32.0
48	65.0	32.0
50	66.3	34.0
53	68.7	34.0
55	70.8	34.0
58	78.5	39.0
60	79.8	39.0
63	82.8	39.0
65	85.8	39.0
68	87.8	39.0
70	90.5	45.0
75	95.2	45.0
80	103.8	45.0
85	109.1	45.0
90	113.8	50.0
95	118.5	50.0
100	123.5	50.0

* Depending on material selected

All specifications, instrumentation and capabilities subject to change without notice

P/N: SSMSU-23

www.steinseal.in