




OUTSIDE MOUNTED MULTI-SPRING BALANCED

SSOMSBB

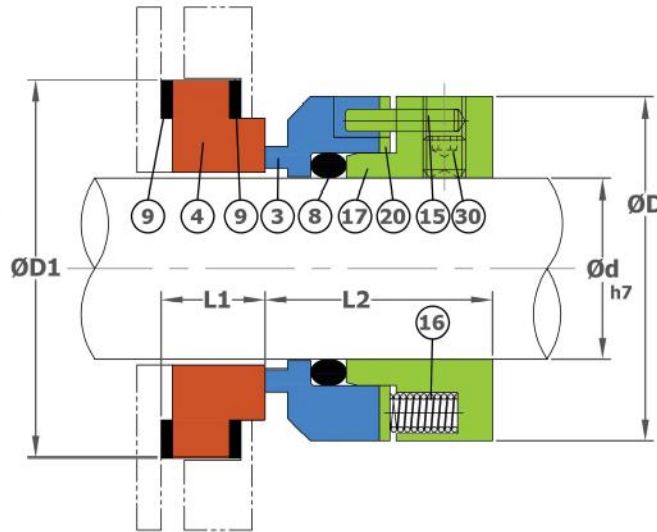

PN	PART
3	ROTATING FACE
4	STATIONARY FACE
8	ROTATING FACE O-RING
9	STATIONARY FACE GASKET
15	LOCK PIN
16	SPRING
17	SPRING HOLDER
20	RETAINING RING
30	SET SCREW

MATERIALS

Hardware : 316 SS, Hastelloy C-276

Rotating face : Carbon, SiC, SSiC

Stationary face : Ceramic, SiC, TC

Elastomers : FKM, FFKM, EPDM

OPERATING CONDITIONS

Media : Oil, Acids, Alkali, etc..

Pressure : ≤ 15 Bar

Temperature * : - 20°C ~ 200°C

Speed : ≤ 20 m/s

SIZE (Inch)	D (mm)	D1 (mm)	L1 (mm)	L2 (mm)
.625	38.9	41.1	17.9	31.95
.750	42.1	44.5	17.9	31.95
.875	45.3	47.5	17.9	31.95
1.000	48.4	53.2	17.9	31.95
1.125	52.0	56.4	17.9	31.95
1.250	55.2	59.5	17.9	31.95
1.375	58.0	61.1	17.9	31.95
1.500	61.2	69.1	17.9	31.95
1.625	64.3	72.2	17.9	31.95
1.750	67.6	78.6	17.9	31.95
1.875	70.7	81.8	17.9	31.95
2.000	73.9	88.1	17.9	31.95
2.125	77.1	94.5	17.9	31.95
2.250	80.2	97.6	17.9	31.95
2.375	83.4	98.4	17.9	31.95
2.500	86.5	104.0	17.9	31.95
2.625	89.7	107.2	17.9	31.95
2.750	92.9	113.5	27.0	31.95
2.875	96.1	116.7	27.0	31.95
3.000	99.2	121.4	27.0	31.95

* Depending on material selected

All specifications, instrumentation and capabilities subject to change without notice

P/N: SSOMSBB-23

www.steinseal.in