




ELASTOMER BELLOWS

SSR

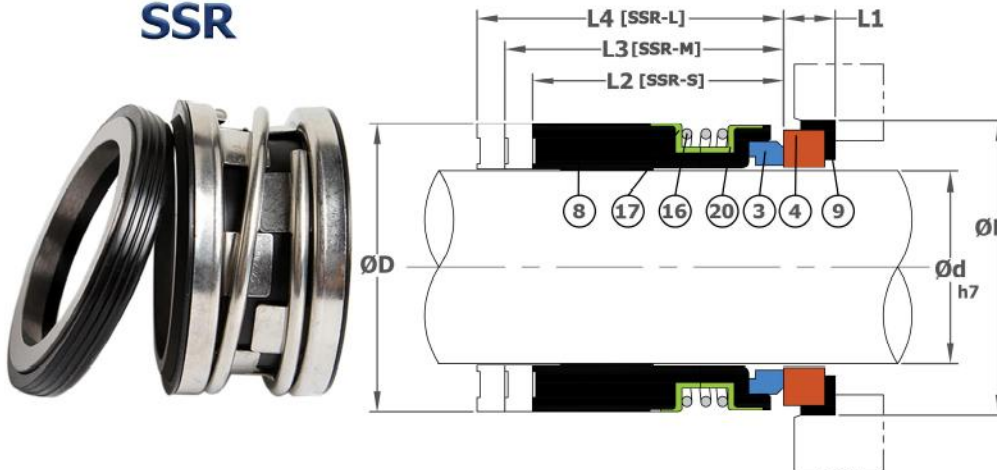

PN	PART
3	--- ROTATING FACE
4	--- STATIONARY FACE
8	--- ROTATING FACE GASKET
9	--- STATIONARY FACE GASKET
16	--- SPRING
17	--- SPRING HOLDER
20	--- RETAINING RING

MATERIALS

Hardware : 316 SS

Rotating face : CARBON, SiC, SiC, TC

Stationary face : Ceramic, SiC, SiC, TC

Elastomers : NBR, FKM, EPDM

OPERATING CONDITIONS

Media : Water, Oil, Less Corrosive
Mediums etc..

Pressure : ≤ 10 Bar

Temperature * : - 20°C ~ 180°C

Speed : ≤ 12 m/s

SIZE d (mm)	D (mm)	D1 (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)
10	20	21	5	15.2	26.7	34.2
12	22	23	6	15.2	26.7	34.2
14	24	25	6	15.2	29.2	34.2
15	25	26	6	15.2	29.2	34.2
16	26	27	6	15.2	29.2	34.2
18	32	33	6	20.2	31.7	39.2
20	34	35	6	20.2	31.7	39.2
22	36	37	6	20.2	31.7	39.2
24	38	39	6	20.2	34.2	43.2
25	39	40	6	20.2	34.2	44.2
28	42	43	6	26.2	34.7	44.2
30	44	45	7	26.2	35.7	44.2
32	46	48	7	26.2	35.7	47.2
33	47	48	7	26.2	35.7	47.2
35	49	50	8	26.2	36.7	47.2
38	54	56	8	30.2	37.2	48.2
40	56	58	8	30.2	37.2	48.2
43	59	61	8	30.2	37.2	50.2
45	61	63	8	30.2	37.2	50.2
48	64	66	10	30.2	37.2	52.2
50	66	70	10	30.2	37.7	52.2
53	69	73	10	30.2	37.7	58.2
55	71	75	10	30.2	37.7	58.2
58	78	78	10	33.2	40.7	60.2
60	80	80	12	33.2	40.7	60.2
63	83	83	12	33.2	40.7	60.2
65	85	85	12	33.2	40.7	68.2
68	88	90	12	33.2	40.7	68.2
70	90	92	12	33.2	47.7	68.2
75	99	97	12	40.2	47.7	68.2
80	104	105	14	40.2	48.2	77.7
85	109	110	14	40.2	48.2	77.7
90	114	115	14	40.2	52.7	77.7
95	119	120	14	40.2	52.7	77.7
100	124	125	14	40.2	52.7	77.7

SIZE d (Inch)	D (mm)	D1 (mm)	L1 (mm)	L2 (mm)
.375	20	22.225	7.9	15.2
.500	24	25.400	7.9	15.2
.625	26	31.750	10.3	15.2
.750	32	34.930	10.3	20.2
.875	36	38.100	10.3	20.2
1.000	39	41.280	11.1	20.2
1.125	42	44.450	11.1	26.2
1.250	46	47.630	11.1	26.2
1.375	49	50.800	11.1	26.2
1.500	54	53.980	11.1	30.2
1.625	56	60.330	12.7	30.2
1.750	61	63.500	12.7	30.2
1.875	64	66.680	12.7	30.2
2.000	66	69.850	12.7	30.2
2.125	69	76.200	14.3	30.2
2.250	77	79.380	14.3	33.2
2.375	80	82.550	14.3	33.2
2.500	83	85.730	14.3	33.2
2.625	83	85.730	15.9	33.2
2.750	89	88.900	15.9	33.2
2.875	96	95.250	15.9	33.2
3.000	99	98.425	15.9	40.2
3.125	103	101.600	19.8	40.2
3.250	104	104.775	19.8	40.2
3.375	108	104.950	19.8	40.2
3.500	112	111.125	19.8	40.2
3.625	114	114.300	19.8	40.2
3.750	118	117.475	19.8	40.2
3.875	122	120.650	19.8	40.2
4.000	124	123.830	19.8	40.2

* Depending on material selected

All specifications, instrumentation and capabilities subject to change without notice

P/N: SSR-23

www.steinseal.in