




ELASTOMER BELLOWS

SSR2

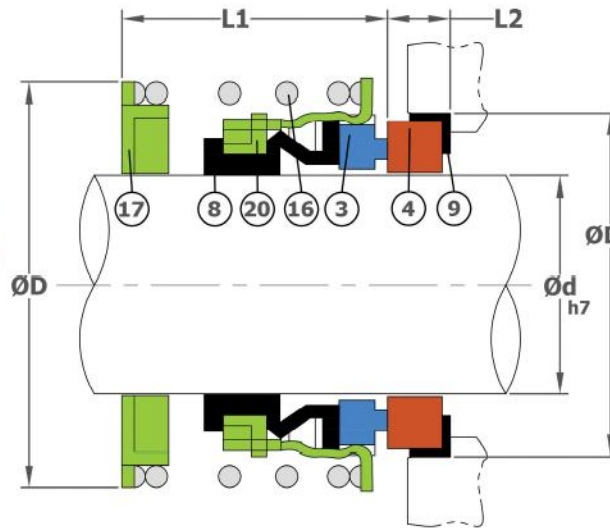

PN	PART
3	--- ROTATING FACE
4	--- STATIONARY FACE
8	--- ROTATING FACE GASKET
9	--- STATIONARY FACE GASKET
16	--- SPRING
17	--- SPRING HOLDER
20	--- RETAINING RING

MATERIALS

Hardware : 316 SS, 304 SS
 Rotating face : CARBON, SiC, SSiC, TC
 Stationary face : SiC, SSiC, TC, Ceramic
 Elastomers : NBR, FKM, EPDM

OPERATING CONDITIONS

Media : Water, Oil, Less Corrosive
 Mediums etc..
 Pressure : ≤ 10 Bar
 Temperature * : - 20°C ~ 180°C
 Speed : ≤ 12 m/s

SIZE d (Inch)	D (mm)	D1 (mm)	L1 (mm)	L2 (mm)
.625	34.0	30.95	25.2	10.3
.750	38.8	34.15	25.2	10.3
.875	41.5	37.30	25.2	10.3
1.000	44.8	40.50	25.2	10.3
1.125	48.5	47.65	33.2	11.9
1.250	57.0	50.80	33.2	11.9
1.375	57.0	54.00	33.2	11.9
1.500	67.0	57.15	33.2	11.9
1.625	67.0	60.35	33.2	11.9
1.750	73.0	63.50	41.2	11.9
1.875	73.0	66.70	41.2	11.9
2.000	79.0	69.85	41.2	13.5
2.125	84.0	73.05	41.2	13.5
2.250	84.0	76.20	41.2	13.5
2.375	90.0	79.40	41.2	13.5
2.500	94.0	82.55	41.2	13.5

SIZE d (mm)	D (mm)	D1 (mm)	L1 (mm)	L2 (mm)
16	34.0	30	25.2	8
18	36.8	32	25.2	8
20	36.8	34	25.2	8
22	41.5	36	25.2	8
25	44.8	39	26.2	8
28	48.5	43	26.2	8
30	52.0	48	26.2	8
35	57.0	53	30.2	10
40	67.0	58	34.2	10
45	73.0	63	36.2	10
50	79.0	68	41.2	10
55	84.0	73	41.2	12
60	90.0	79	41.2	12
65	98.5	86	49.2	12
70	103.5	91	52.2	12
75	110.5	96	52.2	12
80	120.0	105	56.2	14
85	125.0	110	56.2	14
90	132.0	115	56.2	14
95	137.0	120	56.2	14
100	144.0	125	62.2	14

* Depending on material selected

All specifications, instrumentation and capabilities subject to change without notice

P/N: SSR2-23

www.steinseal.in