




# ELASTOMER BELLOWS

## SSR5

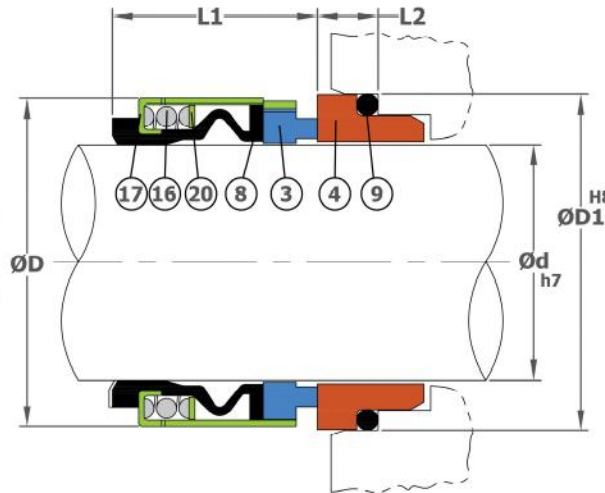

PN	PART
3	--- ROTATING FACE
4	--- STATIONARY FACE
8	--- ROTATING FACE GASKET
9	--- STATIONARY FACE GASKET
16	--- SPRING
17	--- SPRING HOLDER
20	--- RETAINING RING

### MATERIALS

Hardware : 316 SS

Rotating face : SiC, SSiC, TC

Stationary face : SiC, SSiC, TC, Ceramic

Elastomers : NBR, FKM, EPDM

SIZE d (mm)	D (mm)	D1 (mm)	L1 (mm)	L2 (mm)
14	24.0	25	23.0	12.0
16	26.0	27	23.0	12.0
18	32.0	33	24.0	13.5
20	34.0	35	24.0	13.5
22	36.0	37	24.0	13.5
24	38.0	39	27.0	13.5
25	39.0	40	27.0	13.0
28	42.0	43	30.0	12.5
30	44.2	45	30.5	12.0
32	45.8	48	30.5	12.0
33	46.9	48	30.5	12.0
35	48.8	50	30.5	12.0
38	54.2	56	32.0	13.0
40	56.1	58	32.0	13.0
43	58.8	61	32.0	13.0
45	60.9	63	32.0	13.0
48	64.1	66	32.0	13.0
50	66.2	70	34.5	13.5
53	69.1	73	34.5	13.5
55	71.1	75	34.5	13.5
58	78.2	78	39.5	13.5
60	79.9	80	39.5	13.5
63	82.8	83	39.5	13.5
65	85.1	85	39.5	13.5
68	88.0	90	39.5	13.5
70	90.0	92	45.5	14.5
75	97.0	97	45.5	14.5
80	104.0	105	45.5	15.0
85	108.0	110	45.5	15.0
90	114.0	115	50.0	15.0
95	118.0	120	50.0	15.0
100	124.0	125	50.0	15.0

### OPERATING CONDITIONS

Media : Water, Oil, Less Corrosive  
Mediums etc..

Pressure : ≤ 10 Bar

Temperature \* : - 20°C ~ 180°C

Speed : ≤ 12 m/s

\* Depending on material selected

All specifications, instrumentation and capabilities subject to change without notice

P/N: SSR5-23

[www.steinseal.in](http://www.steinseal.in)