




TEFLON BELLOWS

SSTB

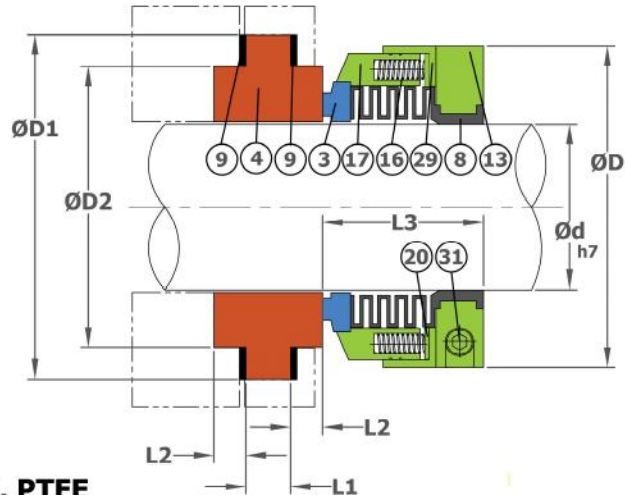

MATERIALS

Hardware : 316 SS

Rotating face : Carbon, SiC, SSiC, PTFE

Stationary face : Ceramic, SiC, SSiC

Elastomers : PTFE

OPERATING CONDITIONS

Media : Sulfuric Acid, Hydrochloric Acid,
Phosphoric Acid, Acetic Acid, Nitric
Acid with Various Degrees, etc..

Pressure : ≤ 10 Bar

Temperature * : - 45°C ~ 120°C

Speed : ≤ 12 m/s

PN	PART
3	--- ROTATING FACE
4	--- STATIONARY FACE
8	--- ROTATING FACE GASKET
9	--- STATIONARY FACE GASKET
13	--- DRIVE COLLAR
16	--- SPRING
17	--- SPRING HOLDER
20	--- RETAINING RING
29	--- BACKUP PLATE
31	--- CAP SCREW

SIZE d (Inch)	D (mm)	D1 (mm)	D2 (mm)	L1 (mm)	L2 (mm)	L3 (mm)
1.000	61	54	42.86	19.05	4.8	33
1.125	67	65	50.80	22.25	8.0	36
1.250	70	68	53.98	22.25	8.0	37
1.375	73	71	57.15	22.25	8.0	38
1.500	76	78	63.50	22.25	8.0	38
1.625	80	81	66.68	22.25	8.0	40
1.750	83	84	69.85	22.25	8.0	40
1.875	86	87	73.03	22.25	8.0	43
2.000	89	97	79.38	28.58	9.5	43
2.125	103	100	82.55	28.58	9.5	53
2.250	107	103	85.73	28.58	9.5	53
2.375	110	106	88.90	28.58	9.5	53

SIZE d (mm)	D (mm)	D1 (mm)	D2 (mm)	L1 (mm)	L2 (mm)	L3 (mm)
25	61	54	42.86	19.05	4.8	33
30	70	68	53.98	22.25	8.0	37
32	70	68	53.98	22.25	8.0	37
35	73	71	57.15	22.25	8.0	38
40	80	81	66.68	22.25	8.0	40
45	83	84	69.85	22.25	8.0	40
50	89	97	79.38	28.58	9.5	43
55	107	103	85.73	28.58	9.5	53
60	110	106	88.90	28.58	9.5	53
65	116	113	95.25	28.58	9.5	53

* Depending on material selected

All specifications, instrumentation and capabilities subject to change without notice

P/N: SSTB-23

www.steinseal.in