




# SINGLE SPRING

## SS05B

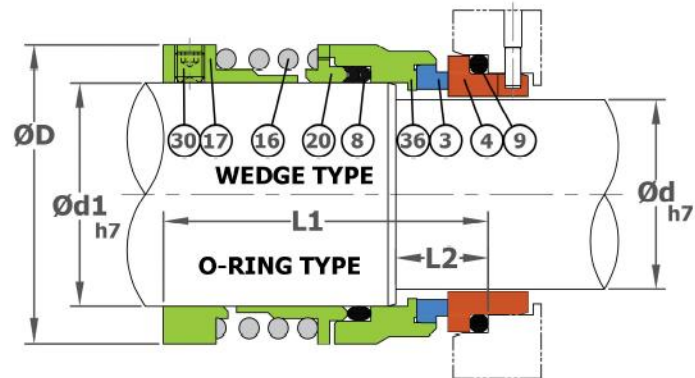

### MATERIALS

Hardware : 316 SS

Rotating face : Carbon, SiC, TC

Stationary face : Ceramic, SiC, TC

Elastomers : FKM, EPDM, FFKM, PTFE, GFT, AFLAS

PN	PART
3	--- ROTATING FACE
4	--- STATIONARY FACE
8	--- ROTATING FACE O-RING / GASKET
9	--- STATIONARY FACE GASKET
16	--- SPRING
17	--- SPRING HOLDER
20	--- RETAINING RING
30	--- SET SCREW
36	--- ROTATING FACE BODY

### OPERATING CONDITIONS

Media : Water, Oil, etc..

Pressure : ≤ 16 Bar

Temperature \* : - 20°C ~ 280°C

Speed : ≤ 26 m/s

SIZE d (mm)	d1 (mm)	D (mm)	L1 (mm)	L2 (mm)
18	22	36	55	20
20	24	38	60	20
22	26	40	60	20
24	28	42	60	20
25	30	44	60	20
28	33	47	65	20
30	35	49	65	20
32	38	54	65	20
33	38	54	65	20
35	40	56	65	20
38	43	59	75	23
40	45	61	75	23
43	48	64	75	23
45	50	66	75	23
48	53	69	85	23
50	55	71	85	25
53	58	78	85	25
55	60	80	85	25
58	63	83	85	25
60	65	85	95	25
63	68	88	95	25
65	70	90	95	25
68	73	93	95	28
70	75	99	95	28
75	80	104	105	28
80	85	109	105	28
85	90	114	105	28
90	95	119	105	28
95	100	124	105	28
100	105	129	105	28

\* Depending on material selected

All specifications, instrumentation and capabilities subject to change without notice

P/N: SS05B-23

[www.steinseal.in](http://www.steinseal.in)