




TEFLON BELLOWS

SSTB1

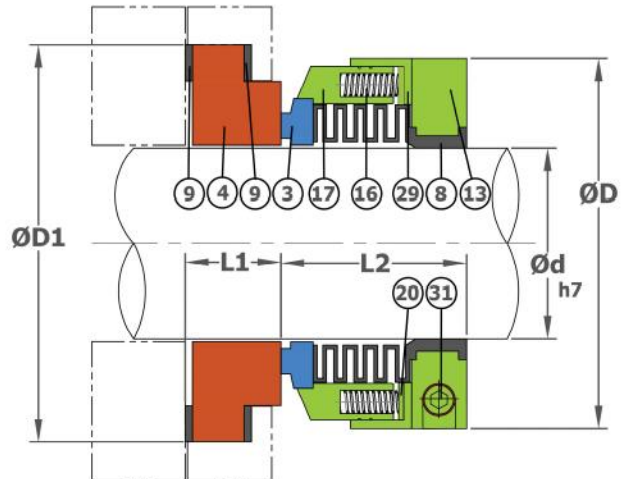

PN	PART
3	--- ROTATING FACE
4	--- STATIONARY FACE
8	--- ROTATING FACE GASKET
9	--- STATIONARY FACE GASKET
13	--- DRIVE COLLAR
16	--- SPRING
17	--- SPRING HOLDER
20	--- RETAINING RING
29	--- BACKUP PLATE
31	--- CAP SCREW

MATERIALS

Hardware : 316 SS
 Rotating face : Carbon, SiC, SSiC, PTFE
 Stationary face : Ceramic, SiC, SSiC
 Elastomers : PTFE

OPERATING CONDITIONS

Media : Sulfuric Acid, Hydrochloric Acid,
 Phosphoric Acid, Acetic Acid, Nitric
 Acid with Various Degrees, etc..
 Pressure : ≤ 10 Bar
 Temperature * : - 45°C ~ 120°C
 Speed : ≤ 12 m/s

SIZE d (mm)	D (mm)	D1 (mm)	L1 (mm)	L2 (mm)
25	61	48	13	33
30	70	53	13	37
35	73	58	13	38
40	80	63	13	40
45	83	68	16	40
50	89	73	16	43
55	107	78	16	53
60	110	83	17	53
65	116	88	17	53

* Depending on material selected