




# WAVE SPRING UNBALANCE

**SSWSU**

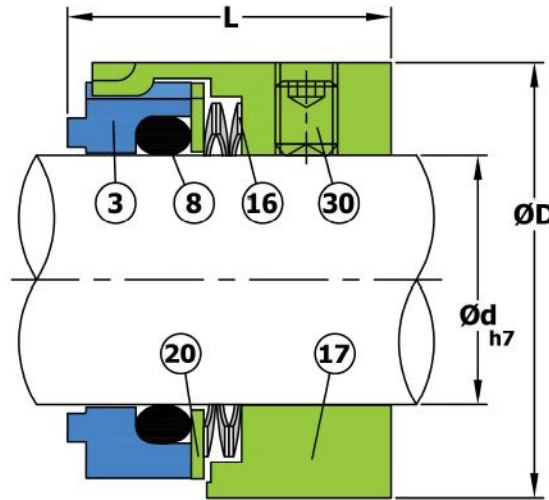

PN	PART
3	ROTATING FACE
8	ROTATING FACE O-RING
16	SPRING
17	SPRING HOLDER
20	RETAINING RING
30	SET SCREW

## MATERIALS

Hardware : 316 SS, 304 SS  
 Rotating face : SiC, SSiC, TC  
 Stationary face : CARBON, SiC, SSiC, TC  
 Elastomers : EPDM, FKM

## OPERATING CONDITIONS

Media : Petroleum, Chemical Solvents,  
 Weak and Medium Acids, Water, Oil,  
 Alkali etc..  
 Pressure :  $\leq 20$  Bar  
 Temperature \* :  $- 20^{\circ}\text{C} \sim 200^{\circ}\text{C}$   
 Speed :  $\leq 20$  m/s

SIZE d (mm)	D (mm)	L (mm)
14	25	25.0
16	27	25.0
18	33	26.0
20	35	26.0
22	37	26.0
24	39	28.5
25	40	28.5
28	43	31.0
30	45	31.0
32	47	31.0
33	48	31.0
35	50	31.0
38	55	31.0
40	57	31.0
43	60	31.0
45	62	31.0
48	65	31.0
50	67	32.5
53	70	32.5
55	72	32.5
58	79	37.5
60	81	37.5
63	84	37.5
65	86	37.5
68	89	37.5
70	91	42.0
75	99	42.0
80	104	42.0
85	109	42.0
90	114	46.8
95	119	47.8
100	124	47.8

\* Depending on material selected

All specifications, instrumentation and capabilities subject to change without notice

P/N: SSWSU-23

[www.steinseal.in](http://www.steinseal.in)